

# A Review on Reconfigurable Antennas for 4G and 5G Wireless Communications

Arpit Jain, Pallav Rawal

Department of Electronics and Communication Engineering Swami Keshanand Institute of Technology,  
Mangernat & Gandhinagar, Jipur, Rajasthan (INDIA)

E-mail: arpitjain3105@gmail.com

Received 01.02.2021, Received in revised form 19.08.2021, Accepted 25.08.2021

**Abstract-** Communication technologies steer by evolution shift need wireless organization to maneuver in reference to multi-function and high potency. Therefore, analysis development on reconfigurable antenna for swap electrical parameters in synchronous as per demand in suits operating state of antenna at any given time. Characteristics and basic properties with single and multiple reconfigurability modes area units investigated. Reconfigurable antennas square measure plan supported parameters like frequency, polarization and radiation. If associate antenna be reconfigurable into many nations need range of active parts. The long-established multi-antennas square measure replaced by a 1 and distinctive antenna. During this paper describe a frequency and polarization plan antenna understand by switch calibration with frequency switches, PIN diode or MEMS frequency switches and structure, that's mainly applicable in multi and single band spring matrix internet and understand amusing operate in between left and right orientated circular polarization in communication system.

**Keywords—** 4G; 5G; Reconfigurable Antenna; Switch; PIN diode; MEMS; Wireless Communications

## 1. INTRODUCTION

Assembling defined as rearranging elements of 1 thing to understand a replacement thing if required operational parameters of the antenna modification, then the antennas should be reconfigured or restored to satisfy the new specifications. Reconfigurable associate antennas modification their performance characteristics by reusing this flow on an antenna, vicinization automatically elements shifts, attenuators, diodes, tunable materials, or active materials.

It modifies the antenna's emission, propagation or bandwidth in some fascinating fashion. So, 2 or more antennas restate into 1, to understand multiple ways. A reconfigurable antenna has parts which modify emission, propagation or bandwidth. The concept of reconfiguring is relatively previous. In early, the two element nulls employing tag sections so as to see the direction of a sign [1]. Bruce and Beck modified dimensions of parallelogram antenna in Figure 1 by widen wires with external means [2]. Reconfiguring the consisted the space axis [3]. The idea formed by azimuth antennas [4].

The antenna was fictitious thought that it's an oversized circular part [5].

Earlier, "reconfigurability" outlined "the nature of change in shape of outward wave" [6]. dynamic modification had space satellite [7], reconfigurable antenna had large technologies applied with several examples [8].

This paper is related to technology. It stated from oldest to the more recent technologies. Through clarification with info and methodology and interesting technologies.

## 2. AUTOMATICALLY MOVABLE ELEMENTS

The first reconfigurable antennas had automatically movable components. Later, huge antennas feed to vary bandwidth, an exquisite later one is that the Arecibo spherical-reflector antenna [9]. It's conjointly potential to position nulls within the antenna signals stepping into the range [10-11]. Contention mesh reflector's surface mistreatment static [7, 12].

## 3. RECONFIGURE ARRAYS

An antenna array (or array antenna) may be a set of connected antennas together as one antenna to transmit and received radio waves. Multiple antennas which are fed from an equivalent transmitter or receiver are an array antenna or antenna array.

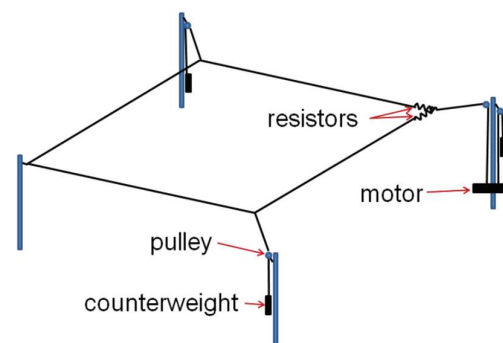


Fig.1 Uniform antenna

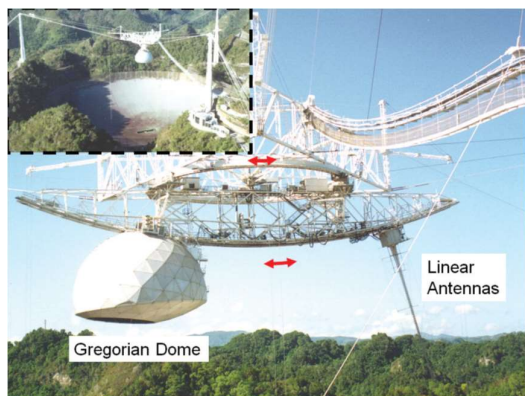


Fig.2 Arch antenna

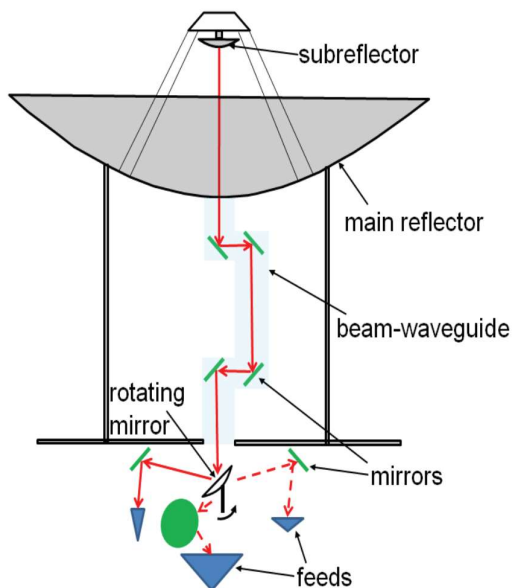


Fig.3 Beam-waveguide antenna

For instance, the TedSat 21 project investigated antenna patches on tiny satellite and aggregation for aperture [18].

4. RF SWITCHES

After RF switch is passage high frequency signals. A Frequency (RF) switch may be a device that routes high frequency signals through transmission paths. They also support the mixing of multiple radios that use common antenna. Some vital characteristics of a switch are unit [19]. RF switch circuits are emerging as a practical solution to affect the switching speed, spacing flexibility, footprint, and filtering issues designers face within the sector of advanced wireless systems. The cut-off frequency [20]  $f_c = \frac{1}{2\pi C_{off} R_{on}}$

Switches are varied to reconfigure as substrate patches in 2D [22]. The verge of adjacent materials measure hind with RF switches, so on customized substrate patch antenna. Figure five slots modify during polarization [23].

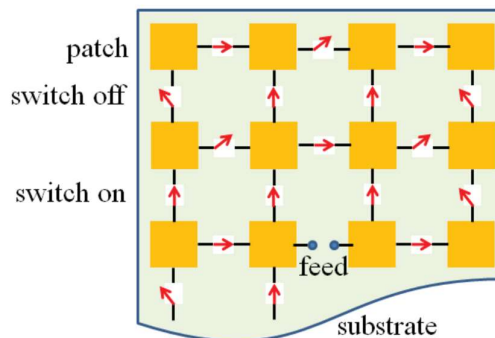


Fig.4 Reconfigurable microstrip patches

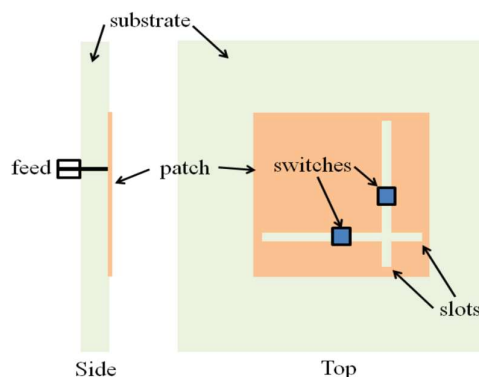


Fig.5 A reconfigurable slotted patch antenna

5. SEMICONDUCTOR SWITCH

Figure 6 Semiconductor materials like silicon (Si), germanium (Ge) and gallium arsenide (GaAs), have electrical properties somewhere within the middle between those of a “conductor” and an “insulator”. They’re not good conductors nor good insulators (hence their name “semi”-conductors). They need only a few “free electrons” because their atoms are closely grouped together in a crystalline pattern called a “crystal lattice” but electrons are still ready to flow but only under special conditions. In [24] instructed vicinization transistor switches in an exceedingly configuration a bit like Figure four. Another wide used is PIN diode [25]. In [23] prompt mistreatment of PIN diodes switches. Variation between 2 forms switches is [26-27]. Recently, a reconfigurable patch antenna by a biased diode [28].

- PIN diodes are unit current controlled whereas FETs square are unit voltage controlled
- PIN diodes have the pliability to manage great RF signal power using lower control power
- It susceptible to electrostatic discharge (ESD) harm

6. MEMS SWITCHES

MEMS switches created on silicon, quartz, glass made from mechanical. Figure eight shows 3 slots

of MEMS switches positions. In Figures 8a and 8b shows working

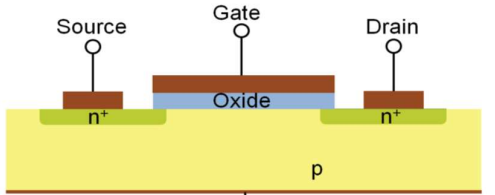


Fig.6 FET

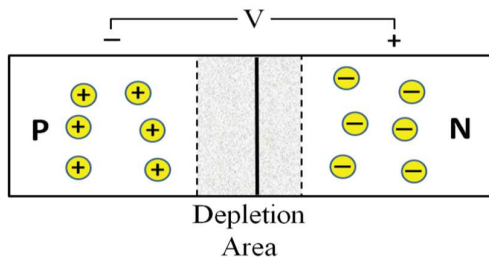


Fig.7 PN diode

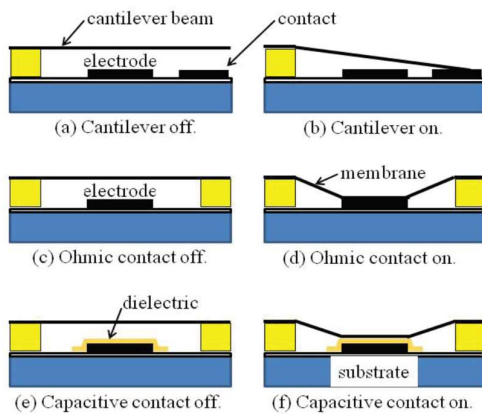


Fig.8 MEMS switches

Freshly, MEMS switches with near stoichiometric films are flourishing [30].

RF-MEMS switches offer excellent reliability with superior precision and RF performance from 0 Hz (DC) to 14 GHz. They require only a low voltage, low current power supply and have a totally independent parallel logic control interface. They're offered in standard surface mount space saving LFCSP plastic packages. They have low power consumption, low insertion loss, and high isolation, lightweight, like semiconductor switches [31].

MEMS switches projected to be utilized in late Nineties [29-34]. MEMS switch power for modification [33]. MEMS's are favored employing various techniques, viable substrates, devices [34].

7. VARACTORS

A varactor diode features a thin layer like insulator (Figure 7) the quantitative capacitance with reverse bias.

It helpful for calibration the antenna Varactors at diverging extend its terribly slim system of measurement to a system of measurement of regarding half hour [35]. Putting varactors with manageable 1st and 2nd resonant frequencies [36]. A partially reflecting surface (PRS) engineered [37-39]. Pattern management has conjointly been incorporated in vicinization varactors.

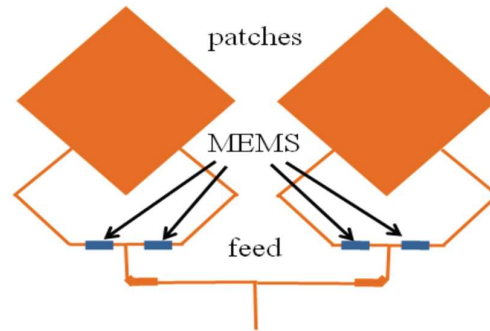


Fig.9 MEMS reconfigurable antenna

8. CONCLUSIONS

These antennas are here since a few years. Initially, they were supported physically. Arrays, Semiconductor and MEMS switches are famous in late Nineties. New approaches to antennas reconfigurable materials requirement based upon present.

9. REFERENCES

- [1] H. T. Friis, C. B. Feldman, and W. M. Shapless, "The Determination of the Direction of Arrival of Short Radio Waves," Proceedings of the Institute of Radio Engineers, January (1934), Volume 22, Issue 1, Pages 47-78.
- [2] E. Bruce and A. C. Beck, "Experiments with Directivity Steering for Radar Reduction," Proceedings of the Institute of Radio Engineers, April (1935) Volume 23, Issue 4, Pages 357-371.
- [3] H. T. Friis, and C. B. Feldman, "Multiple Unit Steerable Antenna for Short Wave Reception," Proceedings of the Institute of Radio Engineers, July (1937) Volume 25, Issue 7, Pages 841-917.
- [4] H. T. Friis and W. D. Lewis, "Radar Antennas," The Bell System Technical Journal, XXVI, 2, April (1947), XXVI, 2, Pages 219-317.
- [5] R. L. Haupt, Antenna Arrays: A Computational Approach, New York, Wiley, 2010.
- [6] E. W. Matthews, C. L. Garcia, and M. D. Rubin, "Technology Considerations for the Use of Multiple Beam Antenna Systems in Communications Satellites," IEEE Transactions on Microwave Theory and Techniques, December (1979), Volume 27, Pages 998-1004.
- [7] A. D. Monk and P. J. B. Clavin, "Adaptive Null Formation with a Reconfigurable Reflecting Antenna," Proceedings of the Institute of Electrical Engineers: Microwave Antennas and Propagation, June (1999) 142, 3, June 1999, Pages 220-224.
- [8] J. T. Bernhard, Reconfigurable Antennas, San Rafael, CA, Morgan & Claypool Publishers, (2007).
- [9] D. A. Bahler, W. Venturino, T. Y. Oishi, and P. W. Chan, Jr., "Beam Waveguide Antenna Performance Predictions with Comparisons to Experimental Results," IEEE Transactions on Microwave Theory and Techniques,

- June (1999), 40(6) Pages 1274-1285
- [10] D. Jacavano, Refl ector Antenna Having Si delche Suppression Elements, US Patent 4631,547, December (1999) 23
- [11] R. L. Haupt, "Adaptive Nulling with a Refl ector Antenna Using Movable Scattering Elements," IEEE Transactions on Antennas and Propagation, 53(2), February 2005, pp 887-890
- [12] A. D. Mirak and P. J. B. Clavicoats, "Adaptive Null Formation with a Reconfigurable Refl ector Antenna" Proceedings of the Institute of Electrical Engineers Microwave Antennas and Propagation, June (1999) 142, 3, Pages 220-224
- [13] B. Tomasic, J. Tuttle, L. Shiang et al., "The Geodesic Dome Phased Array Antenna for Satellite Control and Communication - Subarray Design, Development and Demonstration" IEEE International Symposium on Phased Array Systems and Technology, (2003), Pages 411-416
- [14] P. Rocca and R. L. Haupt, "Dynamic Array Thinning for Adaptive Interference Cancellation" Fourth European Conference on Antennas and Propagation (EuCAP), (2010), Pages 1-3
- [15] W. Kummer, A. Villeneuve, T. Fong and F. Tenio "Ultra Low Side lobes from Time Modulated Arrays," IEEE Transactions on Antennas and Propagation, November (1999), Volume 11 Issue 6, Pages 633-639
- [16] "About ALMA Technology," <http://www.almaobservatory.org/>, May 27, (2009).
- [17] National Radio Astronomy Observatory, "An Overview of the Very Large Array," <http://www.vla.nrao.edu/gpub/overview/>, June 17, (2009).
- [18] H. Steyskal, J. K. Schirler, P. Bianchi et al., "Pattern Synthesis for Te dba21 - A Distributed Space Based Radar System," IEEE Antennas and Propagation Magazine, August (2009) Volume 45 Issue 4, Pages 19-25
- [19] "Chapter 1: Understanding Key RF Switch Specifications" in National Instruments, The Guide to Selecting an RF Switch <http://zone.ni.com/docszone/cdata/tup/id/5776>
- [20] C. L. Goldsmith, Z. Yao, S. Eshelman, and D. Darriston, "Performance of Low Loss RF MEMS Capacitive Switches" IEEE Microwave and Guided Wave Letters, August (1999), Volume 8 Issue 8, Pages 269-271
- [21] "Solid State Switches" in the Microwave Encyclopedia <http://www.microwaves101.com/encyclopedias/switches/solidstatecfm>, November (2010), 18
- [22] J. S. Hlad, M. Davidovitz, and H. Steyskal, Reconfigurable Microstrip Antenna Array Geometry which Utilizes Micro Electro Mechanical System (MEMS) Switches, US Patent 6,198,438 (2001), 198-438
- [23] F. Yang and Y. Rahmat-Samii, "A Reconfigurable Patch Antenna Using Switchable Slots for Circular Polarization Diversity," IEEE Microwave and Wireless Components Letters, March (2009), Volume 12, Issue 3, March (2009), Pages 99-98
- [24] L. N. Hingle et al., "A Reconfigurable Aperture Antenna Based on Switched Links Between Electrically Small Metallic Patches" IEEE Transactions on Antennas and Propagation, June (2004), AP-52, 6, Pages 1434-1445
- [25] The PIN Diode Circuit Designers' Handbook, Microsemi Corp, Woburn, MA, (1998).
- [26] D. Gotch "A Review of Technological Advances in Solid State Switches," Microwave Journal, November (2007), Volume 50 Issue 11, Pages 24-34
- [27] R. H. Cavely and G. Hiller, "Distortion Properties of MESFET and PIN Diode Microwave Switches" IEEE Microwave Symposium June (1999), Volume 2, Pages 533-536
- [28] J. Ori and S. Lim, "Frequency Reconfigurable Metamaterial Resonant Antenna," 2009 Asia Pacific Microwave Conference APMC (2009), Pages 798-801
- [29] E. R. Brown "RF MEMS Switches for Reconfigurable Integrated Circuits," IEEE Transactions on Microwave Theory and Techniques, November (1999) Volume 46 Issue 11, Pages 1868-1880
- [30] S. J. Gross, S. Tadigadapa, T. N. Jackson, S. Tindler, M. Kinstry, and Q. Q. Zhang "Lead Zirconate Titanate Based Piezoelectric Micromachined Switch," Applied Physics Letters, (2009), 83, Pages 174-176
- [31] P. D. Gart, M. W. Derhoff, and R. R. Mansour, "A Comparison Between RF MEMS and Semiconductor Switches" ICMENS, August 25-27, (2009), Pages 515-521
- [32] S. Nilolacu, N. D. Kingsley, G. E. Rudrak, J. Papadynacu, and M. M. Tertzais, "UWB Elliptical Monopoles with a Reconfigurable Band Notch Using MEMS Switches Actuated Without Bias Lines" IEEE Transactions on Antennas and Propagation, AP-57, 8, August (2009), Pages 2242-2251
- [33] G. Wang, T. Rolley, A. Hirt, and J. Papadynacu "A High Performance Tumble RF MEMS Switch Using Barium Strontium Titanate (BST) Dielectrics for Reconfigurable Antennas and Phased Arrays" IEEE Antennas and Wireless Propagation Letters, 4, (2005), Pages 217-220
- [34] G. Wang, D. Thompson, E. M. Tertzais, and J. Papadynacu, "Low Cost RF MEMS Switches Using LCP Substrate" 34th European Microwave Conference (2004), Pages 1441-1444
- [35] P. Bhatia and B. A. H. B. A. H., "Frequency Agile Microstrip Antennas" Microwave Journal, October (1988), Volume 25 Issue 10, Pages 67-70
- [36] N. Behdad and K. Sesharath, "A Variable-Tuned Dual-Band Slot Antenna" IEEE Transactions on Antennas and Propagation AP-54, 2, February (2006), Pages 401-408
- [37] A. R. Wely, T. S. Bid, and Y. J. Guo "A Reconfigurable High Gain Partially Reflecting Surface Antenna" IEEE Transactions on Antennas and Propagation, November (2008) AP-56, 11, Pages 3382-3390
- [38] H. Mizrai and G. Eleftheriades, "A Compact Frequency Reconfigurable Metamaterial-Inspired Antenna" IEEE Antennas and Wireless Propagation Letters (2011), pp 1154-1157
- [39] L. Zhang, F. Yang and A. Elshabari, "Analysis and Design of a Reconfigurable Dual-Strip Scanning Antenna" IEEE Internet